


# Caixun

## User Manual

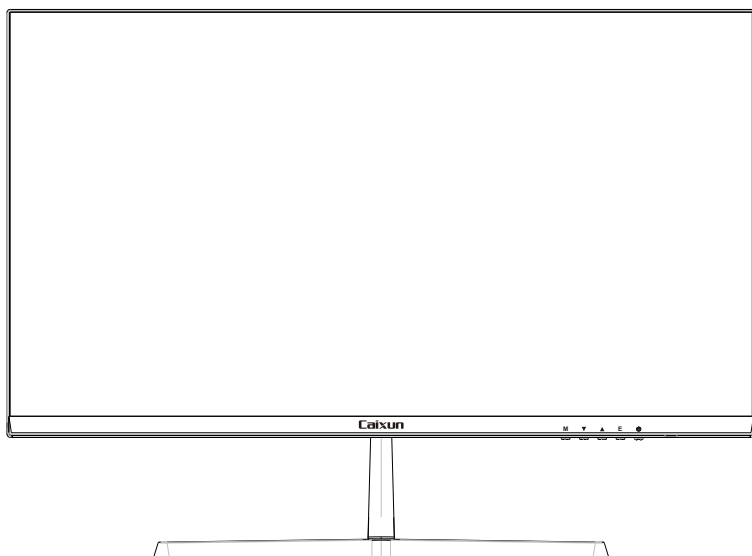

## Full HD Monitor CM22X3

Before using this machine, please read the manual carefully and keep it for future reference.  
Color and appearance may vary depending on the specific model of the product.  
Specifications are subject to future changes to improve performance without notice.

# Table Of Contents

---

Warning! Important Safety Instructions.....1

Accessories.....3

Installation of the base.....3

Adjust The Angle.....3

Cable connection.....4

Panel control.....4

Using The OSD Menu.....5

Other.....8

Help.....8

License.....8

# Warning! Important Safety Instructions

Please read the below warnings carefully before you install and use our product.




## RISK OF ELECTRIC SHOCK DO NOT OPEN

CAUTION: DO NOT REMOVE COVER TO REDUCE RISK OF ELECTRIC SHOCK.

There are no user serviceable parts inside. Be sure to have repairs performed by qualified service personnel.

 This symbol means that dangerously high voltage is present inside. Any form of contact with any part inside the product is dangerous.

 This symbol reminds you of the important instructions that come with the operation and maintenance of this product.

- \*Slots and holes in the chassis and at the rear and bottom are designed to provide necessary ventilation. Do not block or cover these slots and holes in order to ensure the operability of this machine and to prevent it from overheating.  
Do not cover slots and holes with cloth or other materials.  
Do not place the machine on beds, sofas, carpets or other similar surfaces to avoid clogging of said slots and holes.  
Do not place this machine in restricted spaces (eg bookcases or built-in cupboards) unless proper ventilation is provided. A gap of 10 cm should be maintained between the product and the wall.
- \* Do not place this machine near or over electric heaters or radiators, or in places exposed to direct sunlight.
- \* Do not place heat-generating objects (such as candles, ashtrays, incense, flammable gas or explosive substances, etc.) near the product.
- \* Do not place containers filled with water on this machine as this may result in a fire or electric shock hazard.
- \* Do not expose the product to oily substances or chemical agents, as this may cause corrosion of the product casing.
- \* Do not expose this machine to rain or near water (e.g. near a bathtub, sink, kitchen sink, or laundry sink, in a wet basement, or near a swimming pool).  
If the machine gets wet accidentally, please unplug the power cord or power adapter immediately, and then promptly contact an authorized dealer for further assistance. When cleaning the monitor, be sure to use a dry, soft cloth that does not contain volatile substances. Before cleaning, be sure to unplug the power cord or power adapter.
- \* Do not overload wall outlets, extension cords, or integral convenience receptacles as this may result in fire or electric shock.
- \* The power cord or power adapter should be placed in a location where it will not be stepped on or squeezed by objects above or next to it, and special attention should be paid to the wires at the plug, at the integral convenience receptacles and at the outlet of the machine.
- \* To better protect this machine in lightning weather or when it is left unattended or unused for a long time, please unplug its power cord or power adapter, and disconnect the cable system.  
This prevents damage to the machine during a lightning storm or in the event of a power surge on the power line.
- \* Before connecting the AC power cord to the power adapter or monitor power interface (subject to the actual product style), please make sure that your local power supply meets the requirements of power adapter or monitor input voltage.
- \* Be sure not to insert any metal objects into the holes of this machine, otherwise it may cause a danger of electric shock.
- \* Do not touch the inside of this machine to prevent electric shock. Only qualified technicians are allowed to open the cover of this machine.
- \* Make sure that the power cord plug or power adapter can be securely inserted into the outlet. When disconnecting the power cord, make sure to firmly grasp the power plug or power adapter and unplug it from the outlet.
- \* Do not touch the power cord or power adapter with wet hands.
- \* If the machine does not operate normally, especially if it emits any unusual sound or smell, unplug the power outlet immediately and contact an authorized dealer or service center for further assistance.

# Warning! Important Safety Instructions

---

\*If you plan to leave the monitor unused for an extended period of time, or if you are going to be away from home (especially if there are children, the elderly, or people with disabilities left alone), be sure to unplug the power plug or power adapter from the outlet.

Accumulated dust may cause sparks and heat from the power cord or power adapter or cause the insulation of the power cord or power adapter to deteriorate, resulting in electric shock, leakage or fire.

\*After the monitor is moved from a low temperature place to a warm area, it should be placed for a period of time before powering on, so that the condensation inside the monitor can be fully dissipated and dried.

\*The power supply voltage will be marked on the back of the monitor, DC 12V.

\*If you plan to install this product in dusty, high or low temperature, high humidity, chemical-containing environments and 24-hour use locations (such as airports or train stations, etc.), be sure to contact an authorized service center for further assistance. Otherwise, the monitor may be severely damaged.

\*Be sure to use only properly grounded plugs and sockets. Poor grounding may result in electric shock or equipment damage. (for Class I equipment only)

\*To disconnect the power from the device, the power cord or power adapter plug must be unplugged from the machine, so the power cord or adapter plug should be easily accessible.

\*Children are prohibited from climbing on this product.

\*Keep the accessory parts out of the reach of children.

\*Do not install this product in an unstable location, such as a wobbly shelf, sloping floor, or a location subject to external vibration.

\*Do not drop the product or subject it to shock. If the product is damaged, please disconnect the power supply and contact the service center in time for further assistance.

## CAUTION

Risk of explosion if the battery is replaced by an incorrect type

\*replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);

\* disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;

\* leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;

\*a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.



## RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.




## Technical Specifications:

Operating temperature: 0°C~35°C

This equipment complies with radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.


# Accessories

- 1. Please check if all items are included in your monitor set, if there are missing items; please contact your dealer in time.
- 2. Item color and shape may vary by model.
- 3. The cables provided may vary depending on the product purchased.


|        |   |  |   |
|--------|---|--|---|
| Manual |  User Manual for Monitor |  Warranty Card                                  |  Screw |
| Cable  | HDMI cable  | Applies only to monitors with HDMI ports.<br>Not all models come with an HDMI cable, you can purchase this accessory separately. |   |
| Others | Adapter   |  |   |

# Installation of the base

(\*The functions of the monitor may vary depending on the model, the actual product shall prevail)

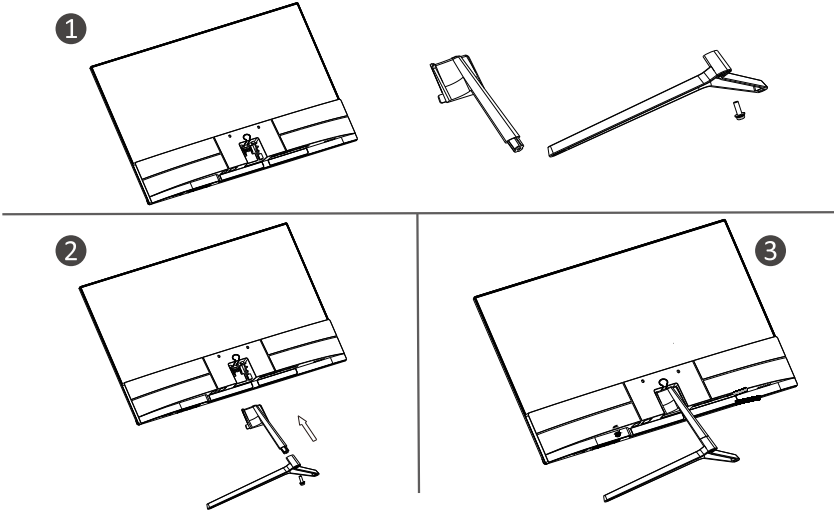

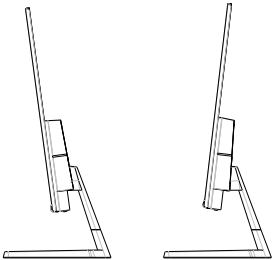

# Adjust The Angle




1. Drawings are for reference only and please refer to the actual monitor.
2. The angle of the screen can be adjusted forward 5° backward 15° for a comfortable.
3. Be careful not to touch or press the screen area when adjusting the angle of the monitor.

# Cable connection

- The configuration information on the back of the monitor varies by product model. Read the following contents before connecting the product.
1. Before connecting the product, be sure to check the two ports of the supplied signal cable, as well as the shape and position of the ports on the product and external devices.
  2. Before connecting the product, be sure to remove the power cord or power adapter from the product and external devices to prevent damage to the product due to short circuits or overcurrent.
  3. After all signal cables are properly connected, connect the power cord or power adapter back to the product and external devices.
  4. After completed the connection, be sure to read the manual to familiarize yourself with the product features, precautions, and other information needed to use the product properly.

|  |  |       |  |
|--|--|-------|--|
| <br>HDMI | HDMI: Using a HDMI cable to connect the product's HDMI port to the PC's HDMI OUT port. |       |  |
| <br>VGA  | PC analog signal input   | DC IN | DC IN 12V: Use the adapter to access the port, the power supply of this interface only supports DC 12V, use the matching adapter to access, please consult the authorized service center for the non-original adapter. |

# Panel control

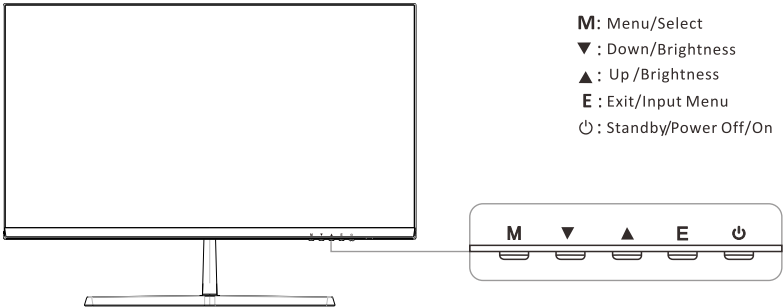

## Using The OSD Menu

---

1. Connect the monitor to your computer via HDMI/VGA.
2. Connect one end of the power cable into the power port of the monitor. Connect the other end into an outlet, then turn the outlet on.


### Note:

It is recommended that a surge protector with adequate voltage is used if the monitor cannot be directly connected to an outlet.

3. Press the power button to turn the monitor on.

### On-Screen display (OSD) menu

The OSD menu allows adjustments to various settings for the monitor.

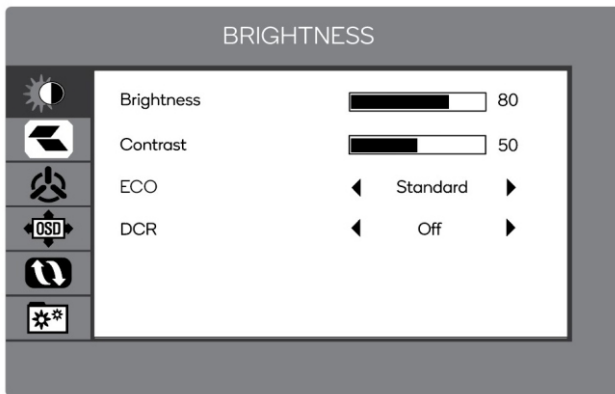

1. Press the menu/select button to access the OSD menu.
2. Press the up and down buttons to browse through the categories of settings. Press the menu/select button to enter the sub-menu.
3. Press the up and down buttons to browse through the sub-menu. Press the menu/select button to enter the adjustment settings of the desired setting.
4. Press the up and down buttons to adjust the desired setting. Press the menu/select button to confirm the adjustment.
5. Press the exit/input menu button to exit the OSD menu.

## Using The OSD Menu

---

### OSD menu settings

Below is a list of the settings available that can be adjusted through the OSD menu.

| Category    | Sub-Menu       | Options                                | Description   |
|-------------|----------------|--|---|
| BRIGHTNESS  | Brightness     | 0-100                                  | Adjusts the display brightness  |
|             | Contrast       | 0-100                                  | Adjusts the display contrast  |
|             | ECO            | Standard, Movie, Game, Text, FPS, RTS, | Sets the display's colour balance to pre-set levels to suit different uses  |
|             | DCR            | On, Off                                | Turns the DCR function on/off   |
| IMAGE       | H. position    | 0-100                                  | Adjusts the horizontal position of the display                              |
|             | V. position    | 0-100                                  | Adjusts the vertical position of the display                                |
|             | Clock          | 0-100                                  | Adjusts the clock setting   |
|             | Phase          | 0-100                                  | Adjusts the phase setting   |
|             | Aspect         | Wide, 4:3                              | Sets the aspect ratio   |
| COLOR TEMP. | Color temp.    | Warm, User, Cool, Normal               | Includes pre-set (Warm, Cool, Normal) and custom (User) colour temperatures |
|             | Red            | 0-100                                  | Allows for manual adjustment of the RGB colour balance                      |
|             | Green          | 0-100                                  |   |
|             | Blue           | 0-100                                  |   |
|             | Low blue light | 0-100                                  | Adjusts the intensity of the low blue light effect                          |

## Using The OSD Menu

|              |                   |  |  |
|--------------|-------------------|--|--|
| OSD SETTINGS | Language          | English, Magyar, Polski, Nederlands, Čeština, Italiano, Deutsch, Français, Slovensčina, Español, Português, Românesc, Български, | Sets the OSD language  |
|              | OSD H. POS.       | 0–100  | Adjusts the horizontal position of the OSD menu  |
|              | OSD V.POS.        | 0–100  | Adjusts the vertical position of the OSD menu  |
|              | OSD timer         | 0–60   | Sets how long the OSD menu will remain on-screen without input (in seconds)                                |
|              | Transparency      | 0–100  | Sets the level of transparency of the OSD menu   |
| RESET        | Image auto adjust | N/A  | Using this feature automatically adjusts the horizontal/vertical position, focus, and clock of the display |
|              | Color auto adjust | N/A  | Using this feature will reset the colour settings to default   |
|              | Reset             | N/A  | Resets the monitor to factory default settings   |
| MISC.        | Signal source     | VGA, HDMI  | Selects the input signal source  |

★ Please subject to the actual status of the menu.

## Other

---

Plug and Play features:

This monitor can be installed on any compatible Plug and Play system.

The interaction between the monitor and the computer system provides optimal operating conditions and monitor settings.

In most cases, the monitor installation will be automatic unless the user chooses another setting.

Acceptable dead pixels:

The display of this product is made using an advanced semiconductor process with an accuracy of over 1 ppm (parts per million).

But some pixels may be too bright or black when displaying red, green, blue or white, this is not bad quality, please feel relieved to use!

This equipment is Class B IT equipment.

As the angle of the user looking at the screen changes, LED light may be seen on the edge of the product's frame, but this phenomenon is not harmful to the human body and does not affect the product's characteristics and performance.

### WARNING

Never place a monitor set in an unstable location. A monitor set may fall, causing serious personal injury or death.

Many injuries, particularly to children, can be avoided by taking simple precautions such as:

1. Using cabinets or stands recommended by the manufacturer of the monitor set.
2. Only using furniture that can safely support the monitor set.
3. Ensuring the monitor set is not overhanging the edge of the supporting furniture.
4. Not placing the monitor set on tall furniture (for example, cupboards or bookcases), without anchoring both the furniture and the monitor set to a suitable support.
5. Not placing the monitor set on cloth or other materials that may be located between the monitor set and supporting furniture.
6. Educating children about the dangers of climbing on furniture to reach the monitor set or its controls.

-----  
If your existing monitor set is being retained and relocated, the same considerations as above should be applied.

Wall-mounted screw: 22-24 inch M4, 28-70 inch M6, 75 inch M8

Note: don't hang at an angle to avoid the risk of falling off.

Note: When using a wall mounting support, the installation height cannot exceed 2m.

## Help

---

Black screen appears/ Cannot turn on the product

1. Please check if the power adapter is connected correctly
2. Please check whether the power adapter is normally connected to the 100-240V AC socket
3. Please check whether the signal detection cable information is displayed on the screen, check the cable connection between the PC and this product
4. Please check whether the HDMI cable is used for connection, if you connect the HDMI cable after the PC is started, or disconnect and reconnect the HDMI cable while using the PC, the screen may not display an image because some graphics cards cannot output a signal, in this case, please restart the PC after connecting the HDMI cable.

## License

---



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.